

type number	hight of cable tray	width fo cable tray	thickness of metal sheet	length of cable tray
KZ 110X200X1.50_S6	110	200	1,5	6000
KZ 110X300X1.50_S6	110	300	1,5	6000







product description: Cable tray is designed to create a cable route.
For connecting the trays there are designated the couplings KDS (2 pcs) and bolts NSM 6X10 (17 pcs per 1 pc coupling - 12 pcs of bolts are used to cable tray sidewall and 5 pcs are used to cable tray bottom).
The cable trays can't be connected over the support.
Bolts NSM 6X10 (min. 2 pcs) are used to attach the cable tray to the support.

surface finish: S6 - Pre-Galvanized according to EN 10346, EN 10143, zinc-layer 15 - 27 μm

certification: ČSN EN 61537:02

storage: ČSN EN 60721-3-1

The graph shows the maximum allowed even loading of the tray in relation to the distances of the supports.

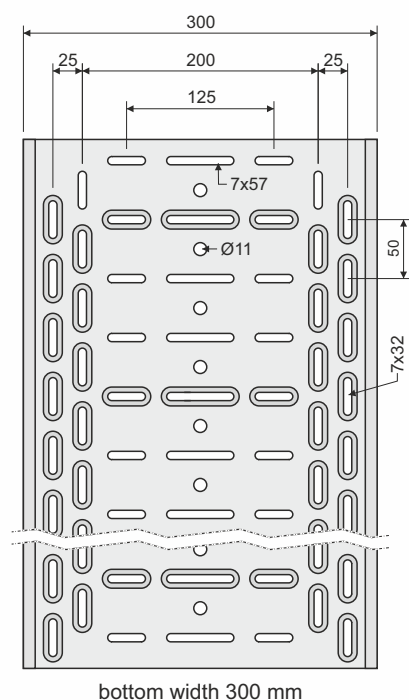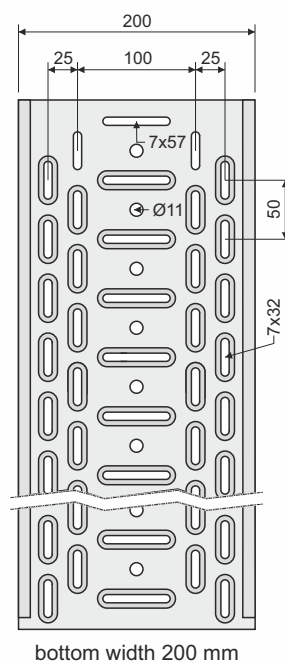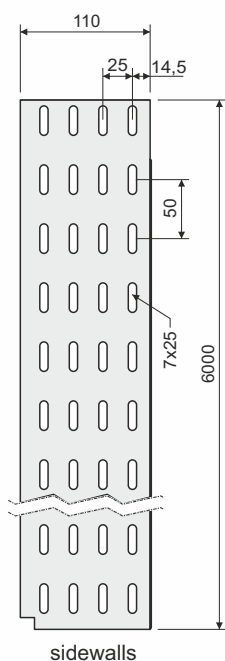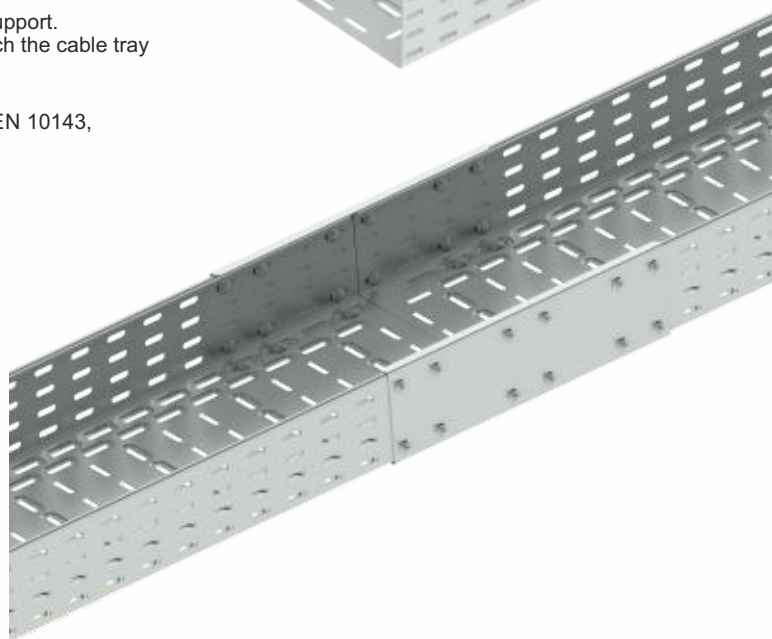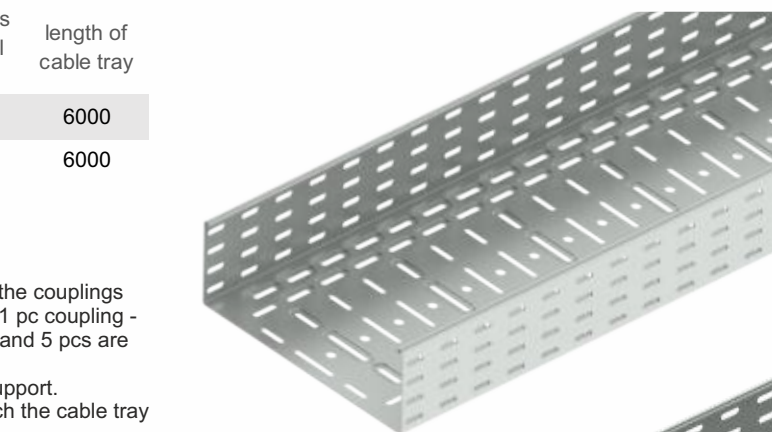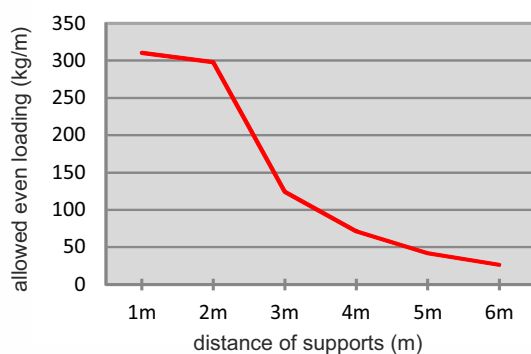

 WARNING**Risk of injury from cutting**

Although the cable trays are produced with maximum effort to minimize sharper edges, it is necessary to wear protective gloves to carry, grip and work with cable elements.

Risk of system collapse

It is essential to strictly adhere to the maximum load limits for individual cable support systems and ensure proper installation according to the installation manual. The load capacity charts for each system are provided in the manufacturer's catalog, available in printed form or on the manufacturer's website. The specified load limits do not account for any additional loads, such as snow, wind, or seismic forces.

Electricity injury

As individual components of cable management systems are made of electrical conductive material, it is essential not to work with a system near live electrical parts. Infringement of the safety regulations may cause serious injury of health or death.

Safe Use

Under normal and foreseeable conditions of use, there are no risks to consumers, provided that proper installation and usage are carried out in accordance with the installation manual.

recycling codes:



cable tray



binding tape