

item number	A (mm)	B (mm)	thickness of metal sheet (mm)	max. load (kg)	weight (kg/pc)
<b>DZDS 100/B_S</b>	150	85	1,5	70,0	0,25
<b>DZDS 150/B_S</b>	200	85	1,5	60	0,26
<b>DZDS 200/B_S</b>	250	85	1,5	60	0,38
<b>DZDS 300/B_S</b>	350	85	2,0	60	0,66
<b>DZDS 100/B_F</b>	150	85	1,5	70	0,27
<b>DZDS 150/B_F</b>	200	85	1,5	60	0,29
<b>DZDS 200/B_F</b>	250	85	1,5	60	0,42
<b>DZDS 300/B_F</b>	350	85	2,0	60	0,68




**product description:**

The support is designed as a supporting structure for fixing wire trays to the wall.

Quick and reliable fixation of the wire tray to the bracket is secured by bending in the fastening tabs.

It is necessary to use a hanger DZZ/B while installing the wire cable tray DZ 60X60 on the wall.

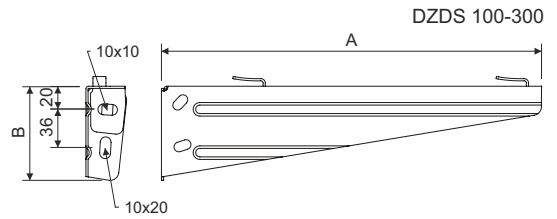

**surface finish:**

S - Pre-Galvanized, zinc-layer 15 - 27 µm

F - Hot Dip Galvanized, average zinc-layer 55 µm (min. 45 µm)

**sales amount:**

á 1 pc

**classification:**

ČSN 73 0895 P90-R

DIN 4102-12 E90

STN 92 0205 PS 90

Fire classification is depend on the specific conditions of the cable tray, detailed in the catalog Systems with maintained functionality in fire.

**storage:**

EN 60721-3-1

