

type number

weight  
(kg/pc)**NKSD\_F**

0,58

product description: With a double-sided installation, this bracket is used to anchor the assembly profile onto the ceiling or floor.


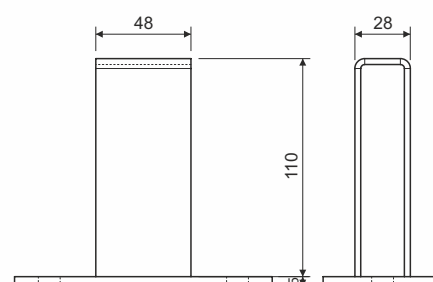
The fixing is carried out by the bolt S 10X70

These items can also be ordered in a varnished version.

surface finish: F - Hot Dip Galvanized according to ČSN EN ISO 1461, zinc-layer 45 µm (min. 35 µm)

sales amount: 1 pc

storage: ČSN EN 60721-3-1

**WARNING****Risk of injury from cutting**

Although the cable trays are produced with maximum effort to minimize sharper edges, it is necessary to wear protective gloves to carry, grip and work with cable elements.

**Electricity injury**

As individual components of cable management systems are made of electrical conductive material, it is essential not to work with a system near live electrical parts. Infringement of the safety regulations may cause serious injury of health or death.

**Safe Use**

Under normal and foreseeable conditions of use, there are no risks to consumers, provided that proper installation and usage are carried out in accordance with the installation manual.

recycling codes:



NKSD



cardboard