

type number	A mm	B mm	for height of cable tray mm	thickness of metal sheet mm	weight kg/ps	amount of bolts for connection kg/pcs
UP 35X42_S	36	28	35	1,2	0,10	4
UP 35X42_ZM				1,5	0,12	
UP 60X85_S	36	53	60, 85	1,2	0,14	6
UP 60X85_ZM				1,5	0,17	
UP 110_S	36	78	110	1,2	0,18	8
UP 110_ZM				1,5	0,22	

product description:

The supporting corner is used to connect the cable tray more firmly without a built-in coupling.

The connection is made by bolt NSM 6X10. To protect the cables, the bolt head is inside the cable tray.

ZM surface finish coupling shall be used for ZM or F surface finish trays.

GMT surface finish bolts shall be used for ZM or F surface finish trays.

These items can also be ordered in a varnished version.

surface finish:

S - Pre-Galvanized steel according to ČSN EN 10346, ČSN EN 10143, zinc-layer 15-27 µm

ZM - Pre-Galvanized steel with admixture of magnesium and aluminum according to ČSN EN 10346, ČSN EN 10143, protective layer 18-31 µm (replacement of hot dip galvanizing)




sales amount:

á 1 pc

meets the requirements: ČSN EN 61537:02

storage:

ČSN EN 60721-3-1

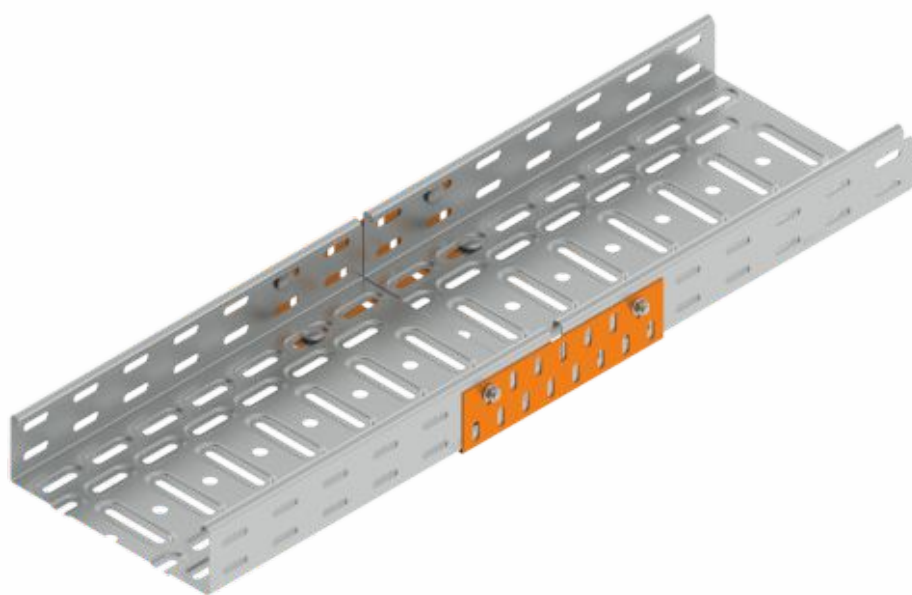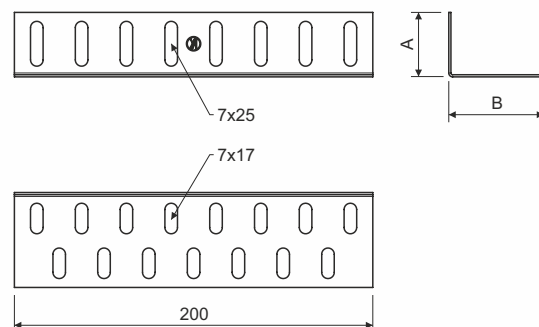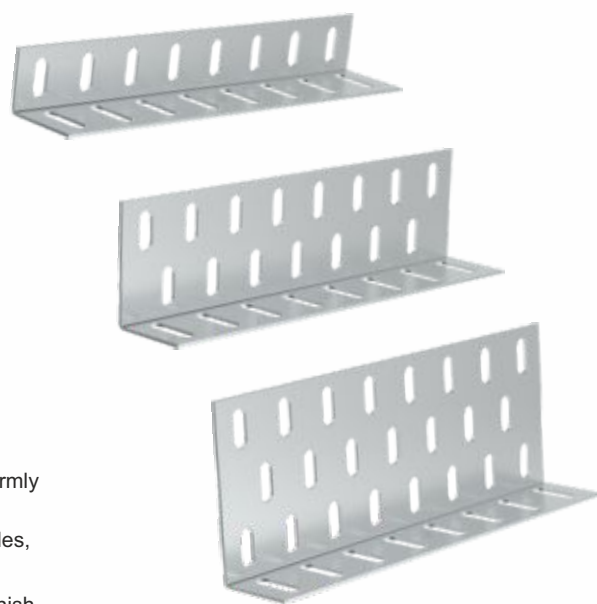

**WARNING****Risk of injury from cutting**

Although the cable trays are produced with maximum effort to minimize sharper edges, it is necessary to wear protective gloves to carry, grip and work with cable elements.

Electricity injury

As individual components of cable management systems are made of electrical conductive material, it is essential not to work with a system near live electrical parts. Infringement of the safety regulations may cause serious injury of health or death.

Safe Use

Under normal and foreseeable conditions of use, there are no risks to consumers, provided that proper installation and usage are carried out in accordance with the installation manual.

recycling codes:



UP



cardboard