

type number	L (mm)	weight (kg/pc)
NMP 300_F	300	0,45
NMP 600_F	600	0,94
NMP 800_F	800	1,24
NMP 1200_F	1200	1,84
NMP 2000_F	2000	3,08
NMP 3000_F	3000	4,82

product description: The assembly profile is used as part of a supporting structure for cable trays and for fastening them to the wall, ceiling or floor.

Designed for fastening the NPR quick-release holder.

An NKO bracket is used to fasten the profile to the wall.



NKSJ or NKSD brackets are used to fasten the profile to the ceiling or floor.

The assembly profile may be supplied in varnished version

surface finish: F - Hot Dip Galvanized according to EN ISO 1461, zinc-layer 55 µm (min. 45 µm)

sales amount: á 1 pc

storage: EN 60721-3-1

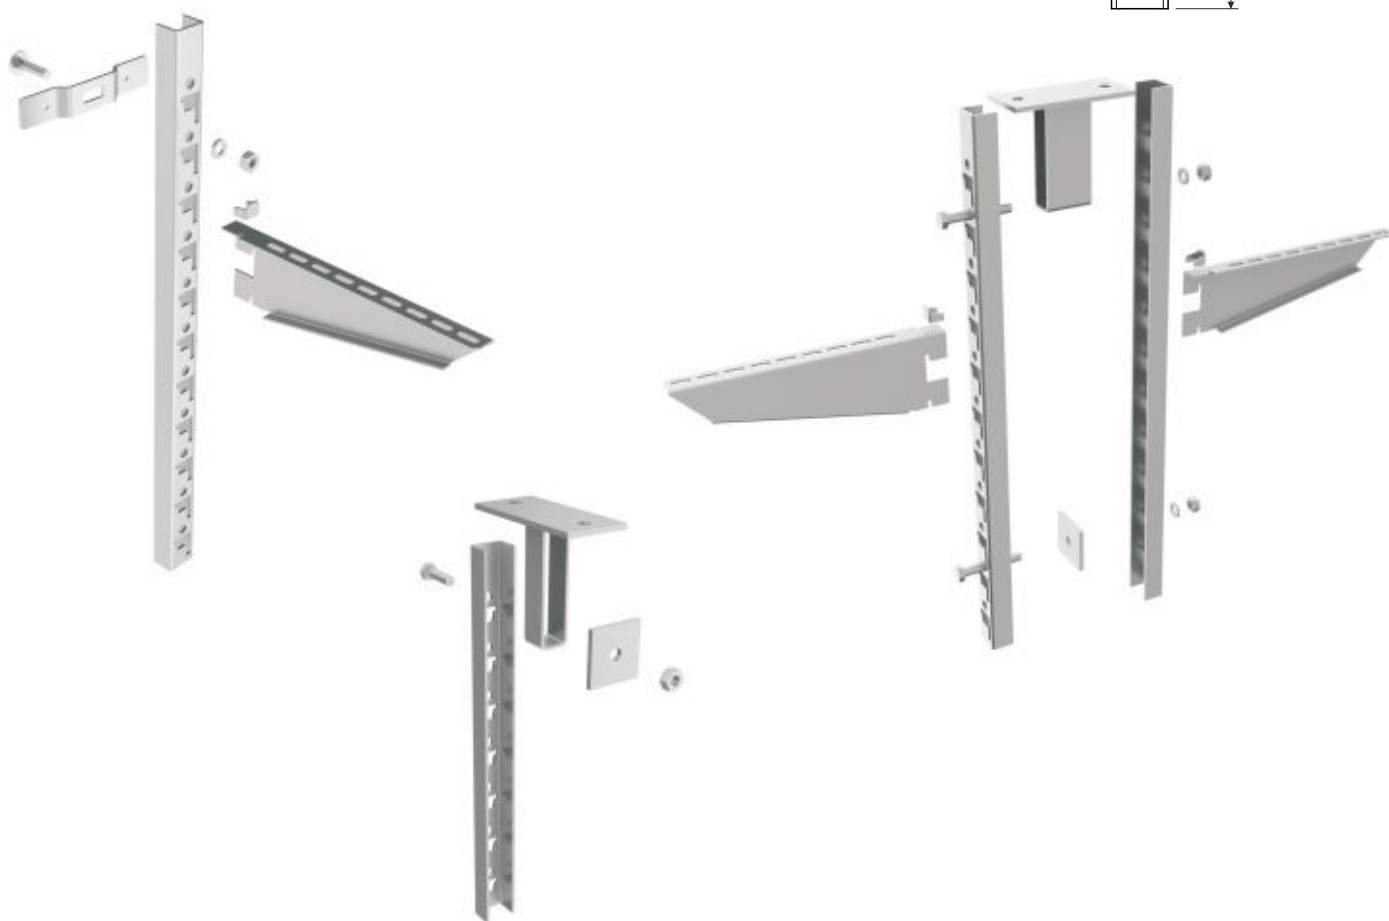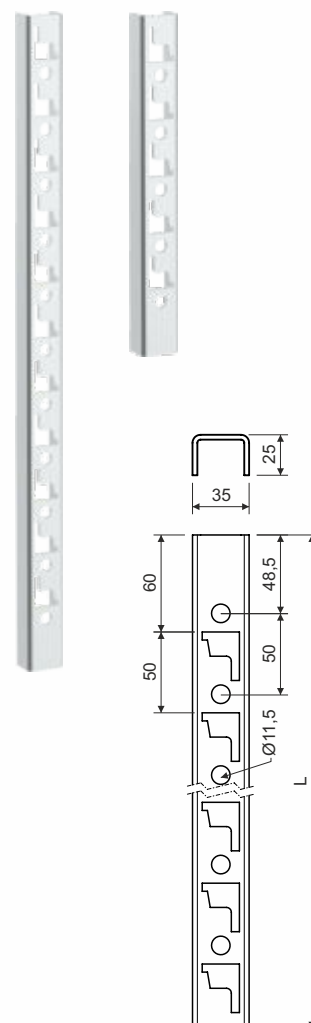

**WARNING****Risk of injury from cutting**

Although the cable trays are produced with maximum effort to minimize sharper edges, it is necessary to wear protective gloves to carry, grip and work with cable elements.

Electricity injury

As individual components of cable management systems are made of electrical conductive material, it is essential not to work with a system near live electrical parts. Infringement of the safety regulations may cause serious injury of health or death.

Safe Use

Under normal and foreseeable conditions of use, there are no risks to consumers, provided that proper installation and usage are carried out in accordance with the installation manual.

recycling codes:



NMP