


typ number

weight
(kg/pc)**NPPZ_F**

0,09

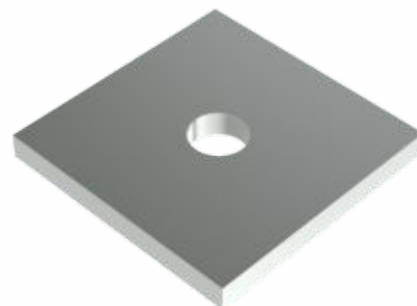

product description: This washer is used when installing the NMP assembly profile.

With a one-sided installation of the NMP assembly profile, when fixing the NKSJ bracket the washer is used below the nut together with an S 10X40 bolt.

With a double-sided installation of the NMP assembly profile, the washer is used as a spacer between the two assembly profiles. It is fixed in place using an S 10X70 bolt.

These items can also be ordered in a varnished version.

surface finish:


F - Hot Dip Galvanized according to ČSN EN ISO 1461, zinc-layer 45 µm (min. 35 µm)

sales amount:

1 pc

storage:

ČSN EN 60721-3-1

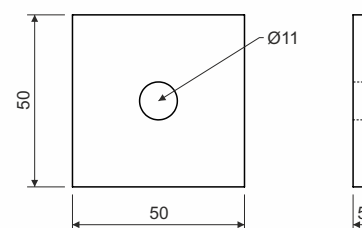

**WARNING****Risk of injury from cutting**

Although the cable trays are produced with maximum effort to minimize sharper edges, it is necessary to wear protective gloves to carry, grip and work with cable elements.

Electricity injury

As individual components of cable management systems are made of electrical conductive material, it is essential not to work with a system near live electrical parts. Infringement of the safety regulations may cause serious injury of health or death.

Safe Use

Under normal and foreseeable conditions of use, there are no risks to consumers, provided that proper installation and usage are carried out in accordance with the installation manual.

recycling codes:



NPPZ