

item number	L mm	outer holer (A) mm	thickness of metal sheet mm	weight kg/pc
NZ 62_S NZ 62_ZM	107	9x18	1,0	0,06
NZ 125_S NZ 125_ZM	170	9x18	1,0	0,09
NZ 250_S NZ 250_ZM	295	9x18	1,0	0,15
NZ 500_S NZ 500_ZM	545	11x20	1,0	0,29

product description:

This suspension piece is suitable for creating a support for a cable tray running through a MARS cable tray. It is fixed in place using two ZT 8 threaded rods (ZT 10 if NZ 500 is used).

The cable tray is attached to the suspension piece using NSM 6X10 bolts. To protect the cables, the bolt head is inside the cable tray.

ZM surface finish suspension piece shall be used for F surface finish trays.

GMT surface finish bolts shall be used for F surface finish trays.

These items can also be ordered in a varnished version.

surface finish:

S - Pre-Galvanized steel according to ČSN EN 10346, ČSN EN 10143, zinc-layer 15-27 µm

ZM - Pre-Galvanized steel with admixture of magnesium and aluminum according to ČSN EN 10346, ČSN EN 10143, protective layer 18-31 µm (replacement of hot dip galvanizing)





sales amount:

á 1 pc

meets the requirements: ČSN EN 61537:02

storage:

ČSN EN 60721-3-1

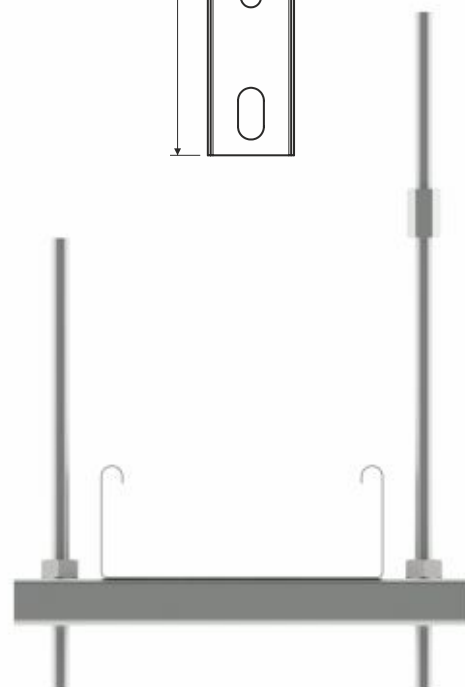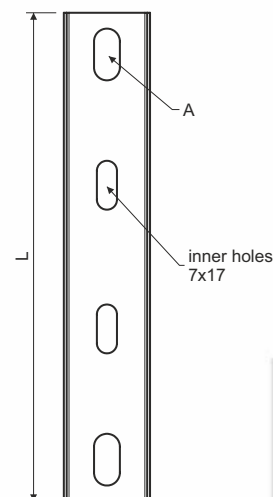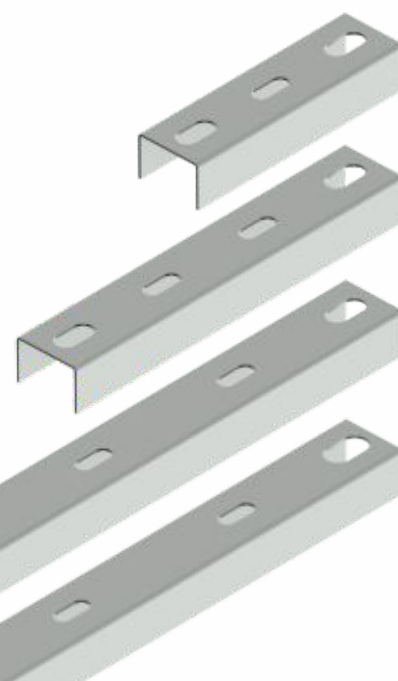

**WARNING****Risk of injury from cutting**

Although the cable trays are produced with maximum effort to minimize sharper edges, it is necessary to wear protective gloves to carry, grip and work with cable elements.

Electricity injury

As individual components of cable management systems are made of electrical conductive material, it is essential not to work with a system near live electrical parts. Infringement of the safety regulations may cause serious injury of health or death.

Safe Use

Under normal and foreseeable conditions of use, there are no risks to consumers, provided that proper installation and usage are carried out in accordance with the installation manual.

recycling codes:



NZ