


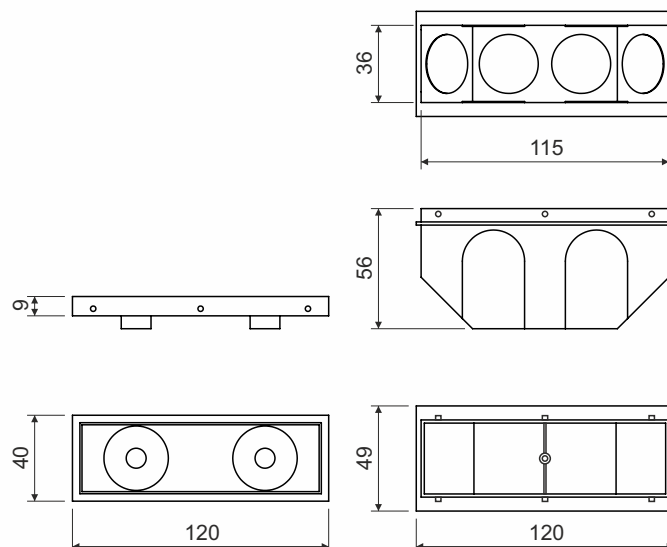

product
description:

for outlet of multiple piping into one place (e.g. at the location of future distribution systems)

box cover is fixed to the formwork using nails or screws

after solidification, remove the front rip-out part of the lid

material: PE (halogen-free)

color: orange

self-snuffing: no

temperature resistance: -5 - +60 °C (short-time +90 °C)

flaming loop test: 650 °C

fire class for underlying material: A1

weight: 43 g

meets the requirements: EN 60 670-1

storage: ČSN 64 0090

KBS-120_AB - 10 pcs of boxes packed in foil, labeled; 60 pcs of boxes in cardboard

recycling symbols:



box



foil



cardboard

 WARNING

risks associated
with

using the products: incorrect electrical installation can cause a fire - we recommend the connection to be carried out exclusively by an authorized person

when installing the boxes into the steel reinforcement, be extra careful, use appropriate protective equipment

follow the manufacturer's installation instructions according to the installation instructions and videos

damage to the product - if the box is visibly damaged, stop using it

under normal and foreseeable conditions of use, the installed box does not pose any risks to consumers