
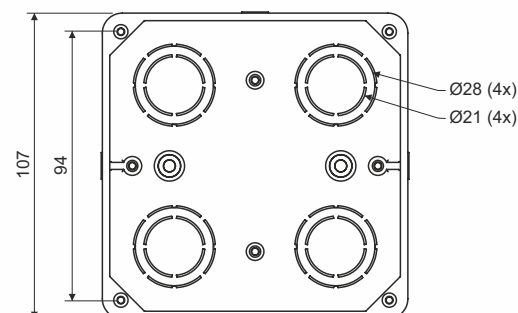
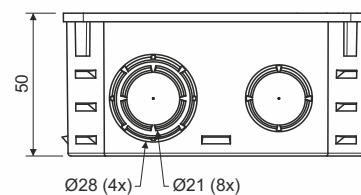


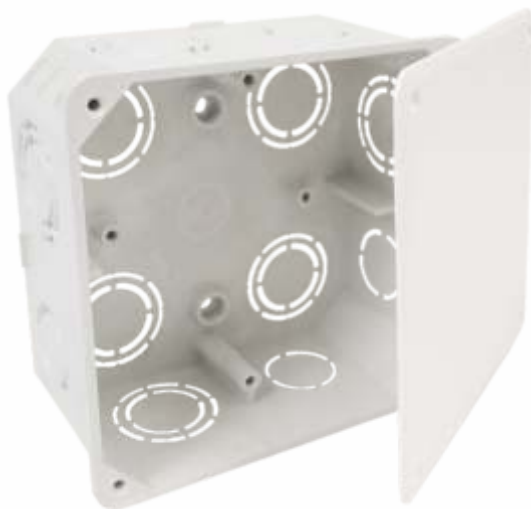

product description:

designed for distribution system with voltage 400 V and with maximum current 16 A
a large number of knockouts for introducing cables and pipes

material: PVC

color: grey

self-snuffing: yes, within 30 s

temperature resistance: -5 - +60 °C

flaming loop test: 850 °C

fire class for underlying material: A1-D

weight: 155 g

meets the requirements: ČSN EN 60670-1, ČSN EN IEC 60670-1 ed. 2:21

storage: ČSN 64 0090

KO 100_KA - 1 pc box with lid KO 100 V and screws in foil, 74 pcs boxes in a carton

accessories:

terminal plate S-66; S-96; SP-96

screwless terminal plates TYP015, TYP016, TYP017, TYP018

recycling symbols:



box



foil



cardboard



screws



WARNING

risks associated with

using the products: incorrect electrical installation can cause a fire - we recommend the connection to be carried out exclusively by an authorized person

follow the manufacturer's installation instructions according to the installation instructions and videos

damage to the product - if the box is visibly damaged, stop using it

under normal and foreseeable conditions of use, the installed box does not pose any risks to consumers