


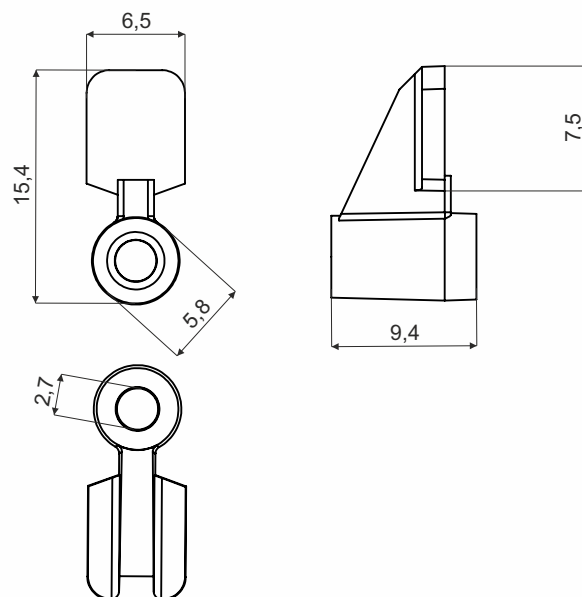

product
description:

used to fixing KOPOS boxes of type KUL, KPL and KPRL into hollow walls
used in combination with mounting screw 3x35V-2CH_ZNCR
the flap contains glass fibers to increase strength

material: PA

color: gre

self-snuffing: yes, within 30 s

temperature resistance: -5 - +60 °C

flaming loop test: 850 °C

fire class for underlying material: A1-F

weight: 0,4 g

meets the requirements: ČSN EN 60670-1, ČSN EN IEC 60670-1 ed. 2:21 complete with box

storage: ČSN 64 0090

PATKA CR_KA - 50 pcs flaps packed in a foil, labeled; 1800 pcs of frames packed in carton

recycling symbols:



flap



cardboard



foil

 WARNING

risks associated
with

using the products: incorrect electrical installation can cause a fire - we recommend the connection to be carried out exclusively by an authorized person

follow the manufacturer's installation instructions according to the installation instructions and videos

damage to the product - if the product is visibly damaged, stop using it

under normal and foreseeable conditions of use, the installed flap does not pose any risks to consumers