


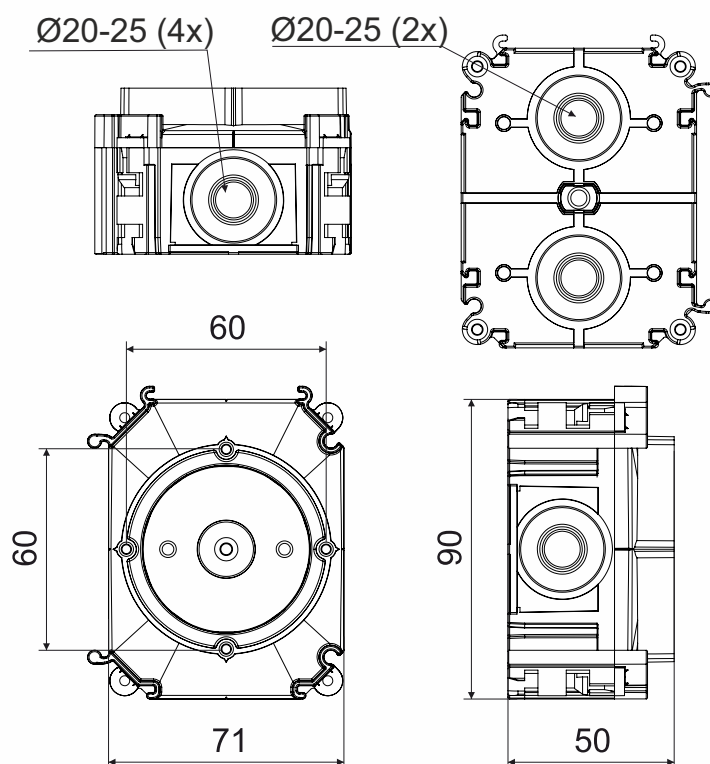

product
description:

- device box for cast concrete - installation depth 50mm
- lid of the box suitable for inserting the SB-M1 adhesion magnet for fixing the box to the metal formwork
- possibility of fixing the box lid with nails or screws on wooden formwork
- sealed connection between lid and box
- inlets for pipes fitted with a sealing membrane to prevent the concrete penetration
- inlets for pipes Ø 16, **20, 25**
- possibility of fixed box connection to 71 mm and 90 mm spacing
- possibility of fixing the box to the metal armature with SB-MK 1 mounting wings (not included in the package)
- possibility of using the box for double-sided mounting - mutual fixation with steel rods Ø6 mm KBP-8 (not included)

material: PP+TPE (halogen-free)

colour: orange / grey

temperature resistance: -25 - +60 °C (short-term +90 °C)

hot loop test: 650 °C

fire reaction class of underlying: A1

weight: 44 g

meets the requirements of: ČSN EN IEC 60 670-1 ed.2

storage: ČSN 64 0090

SB-KP 60-50/M_AB - 5 boxes and lids wrapped in foil, labelled; 60 pcs in carton

recycling symbols:



box



foil



cardboard



WARNING

risks associated
with

using the products: incorrect electrical installation can cause a fire - we recommend the connection to be carried out exclusively by an authorized person

when installing the boxes into the steel reinforcement, be extra careful, use appropriate protective equipment

follow the manufacturer's installation instructions according to the installation instructions and videos

damage to the product - if the box is visibly damaged, stop using it

under normal and foreseeable conditions of use, the installed box does not pose any risks to consumers