


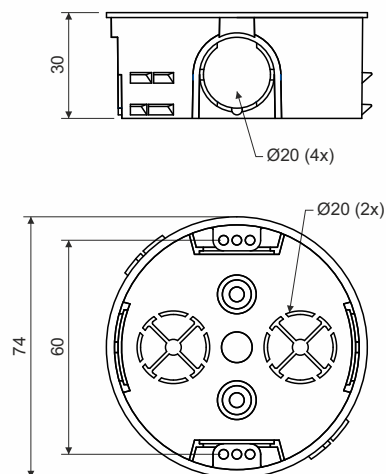

product
description:

designed for distribution system with voltage 400 V and with maximum current 16 A
for premises with increased need for protection of persons and property
allows the installation of wiring in thin partitions
allows to install double-socket

material: PC-ABS (halogen-free)

color: black

self-snuffing: yes, within 30 s

temperature resistance: -5 - +60 °C

flaming loop test: 850 °C

fire class for underlying material: A1-D

weight: 17 g

meets the requirements: ČSN EN 60670-1, ČSN EN IEC 60670-1 ed. 2:21

storage: ČSN 64 0090

KP 68/2HF_FA - 10 boxes packed in shrink film, packaging labelled, screws included; 150 boxes in carton

accessories:

cover V 68HF
extending frames NR 5X5
blind cover ZV 68
screwless terminal plates TYP015, TYP016, TYP017, TYP018

auxiliary tools:

non-hammered masonry cutter FR 68 SDS

recycling symbols:



box



foil



cardboard



WARNING

risks associated
with

using the products:

incorrect electrical installation can cause a fire - we recommend the connection to be carried out exclusively by an authorized person
follow the manufacturer's installation instructions according to the installation instructions and videos
damage to the product - if the box is visibly damaged, stop using it
under normal and foreseeable conditions of use, the installed box does not pose any risks to consumers