
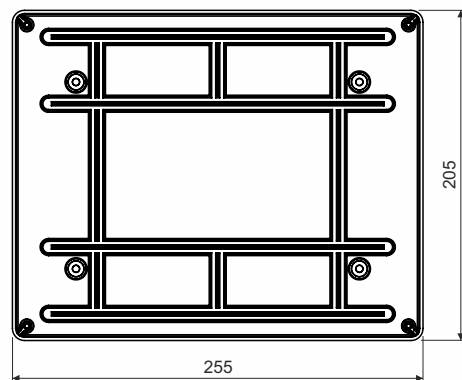


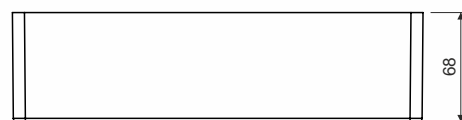

product description:

designed for distribution system with voltage 400 V and with maximum current 16 A
boxes for communication and power distribution
at the bottom of the box are grooves for mounting the telephone terminals
suitable for surface mounting - lid follows the size of the box
boxes without preformed knockouts

material: PVC

color: gray

self-snuffing: yes, within 30 s

temperature resistance: -5 - +60 °C

flaming loop test: 850 °C

fire class for underlying material: A1-D

weight: 657 g

meets the requirements: ČSN EN 60670-1, ČSN EN IEC 60670-1 ed. 2:21

storage: ČSN 64 0090

KT 250_KB - 1 pc box, lid and screws packings in foil, 11 pcs placed in carton

accessories:

terminal plate S-66; S-96; SP-96
screwless terminal plates TYP015, TYP016, TYP017, TYP018
support trunking TS35

recycling symbols:



box, cover



foil



cardboard



screws

**WARNING**

risks associated with

using the products: incorrect electrical installation can cause a fire - we recommend the connection to be carried out exclusively by an authorized person
follow the manufacturer's installation instructions according to the installation instructions and videos
damage to the product - if the box is visibly damaged, stop using it
under normal and foreseeable conditions of use, the installed box does not pose any risks to consumers