


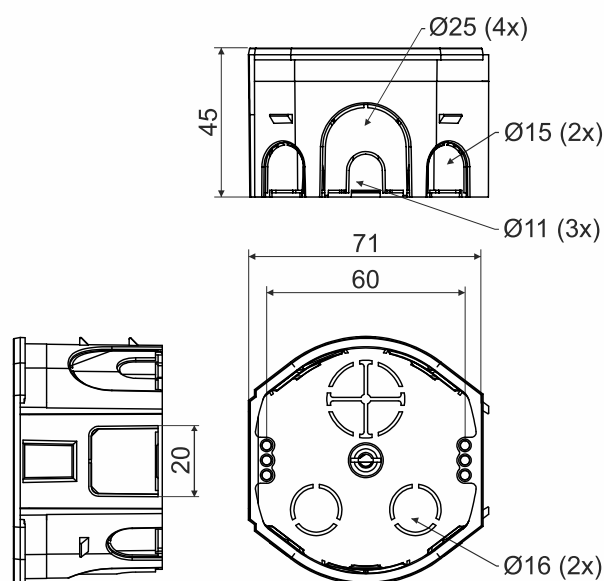

product description: designed for distribution system with voltage 400 V
with cover KO 68
to create path branches

material: PVC

color: gray

self-snuffing: yes, within 30 s

temperature resistance: -5 - +60 °C

flaming loop test: 850 °C

fire class for underlying material: A1-D

weight: 43 g

meets the requirements: ČSN EN 60670-1, ČSN EN IEC 60670-1 ed. 2:21

storage: ČSN 64 0090

KU 68-45/V_KA - 100 pcs with covers in carton separately, instrument screws inserted in package

accessories: blind cover ZV 68
extending frames NR 5X5, NR 68/6, NR 68/10
extending piece TN 68
screwless terminal plates TYP015, TYP016, TYP017, TYP018

auxiliary tools: non-hammered masonry cutter FR 68 SDS

recycling symbols:



box, cover



cardboard



screws



WARNING

risks associated with

using the products: incorrect electrical installation can cause a fire - we recommend the connection to be carried out exclusively by an authorized person

follow the manufacturer's installation instructions according to the installation instructions and videos

damage to the product - if the box is visibly damaged, stop using it

under normal and foreseeable conditions of use, the installed box does not pose any risks to consumers