



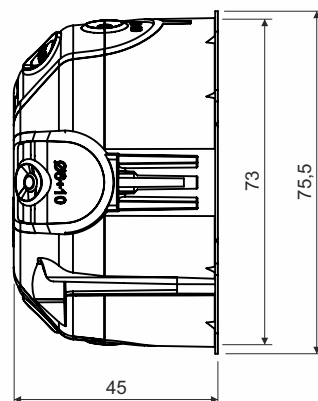

69dB

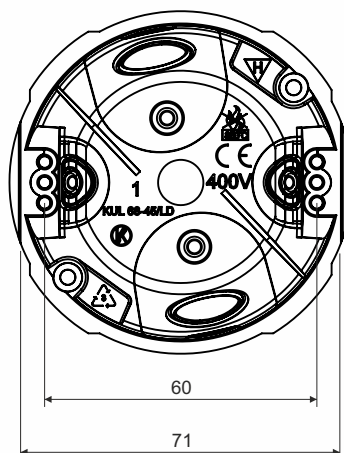

product description:

designed for distribution system with voltage 400 V and with maximum current 16 A  
 designed for mounting into hollow walls (eg. walls of plasterboard)  
 inlet openings made of flexible material  
 marked inputs for sealing cables and pipes in the flexible material (6x  $\text{C}6\text{-}10\text{ mm}$ , 2x  $\text{C}20\text{-}25\text{ mm}$ )  
 air-tightness even with inserted cable or pipe  
 suitable for low energy and passive houses  
 prevents airflow through the installation  
 mounting screws with plastic foot are fitted with a twin self-tapping thread for quick installation  
 when mounting, it is not necessary to countersink the plasterboard edge  
 possibility to insert screwless terminals  
 IP protection is IP 30 (with the cover V 68 mounted)  
 suitable for soundproof walls with maximum soundproofing  $R_w = 69\text{dB}$

material: PVC (Pb Free)

color: yellow

self-snuffing: yes, within 30 s

temperature resistance:  $-5 - +60\text{ }^{\circ}\text{C}$

flaming loop test:  $850\text{ }^{\circ}\text{C}$

fire class for underlying material: A1-F

weight: 45 g

meets the requirements: ČSN EN 60670-1, ČSN EN IEC 60670-1 ed. 2:21

storage: ČSN 64 0090

KUL 68-45/LD2\_NA - boxes fitted with screws for mounting into double wall and V 68 cover - package: 100 pcs in carton\_EN

accessories:

terminal plate S-66  
 screwless terminal plates TYP015, TYP016, TYP017, TYP018

auxiliary tools:

saw-drill VPT 68  
 universal carrier VPTU

recycling codes:



box, cover



feet



screws



carton

#### WARNING

risks associated  
with

using the products: incorrect electrical installation can cause a fire - we recommend the connection to be carried out exclusively by an authorized person

follow the manufacturer's installation instructions according to the installation instructions and videos

damage to the product - if the box is visibly damaged, stop using it

make sure the box is properly attached and secured to prevent accidental loosening

installing an unsuitable box can negatively affect the sound and thermal insulation of the room

under normal and foreseeable conditions of use, the installed box does not pose any risks to consumers