


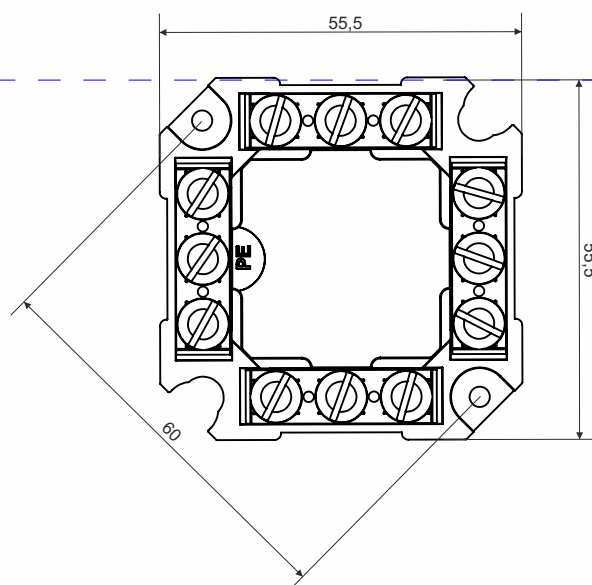

product
description:

intended use in distribution boxes with fixing spacing of 60 mm

four separate fields for connecting up to three conductors of up to 4 mm² cross-section

for voltages of up to 400 V

for boxes: KU 68-1901, KU 68-1901HF, KU 68-1902, KU 68-1903, KUH 1, KO 100, KO 100 E, KO 125, KO 125 E, KO 180/LD, KT 250, KT 250/1, KU 68 LD/1HF, KU 68/71L1, KU 68 LA/1HF, KUL 68-45/LD, KUL 68-45/LD2, KPR 68/71L, KI 68 L/1, KO 110/L, KO 125/1L, KT 250/L, KUH 1/L, LK 80/1, LK 80/2, LK 80/3, LK 80X28/1, LK 80R/1, LK 80R/2, LK 80R/3, LK 80X20R/1, LK 80X28R/1, LK 80X28 2R, LK 80X16 T, LK 80X28 T, LK 80X28 2T, KSK 80, KSK 100, KSK 125, KSK 175, 8101, 8102, 8106, 8107

material: PA (halogen-free)

color: black

self-snuffing: yes, within 30 s

temperature resistance: -30 - +105 °C

flaming loop test: 850 °C

fire class for underlying material: A1-F

weight: 42 g

meets the requirements: EN 60998-1

storage: ČSN 64 0090

S-66_FB - 10 terminal plates packed in a foil, labeled; 160 terminal plates packed in cardboard

recycling symbols:



terminal plate



screws, clamp strap



screws, clamp strap



foil



cardboard

 WARNING

risks associated
with

using the products: incorrect electrical installation can cause a fire - we recommend the connection to be carried out exclusively by an authorized person

follow the manufacturer's installation instructions according to the installation instructions and videos

damage to the product - if the box is visibly damaged, stop using it

make sure the product is properly attached and secured to prevent accidental loosening

under normal and foreseeable conditions of use, the installed product does not pose any risks to consumers