

type number	for height of cable tray	thickness of metal sheet	weight kg/pc	amount of bolts for connection	
NRD 50_S	50	0,7	0,12	2	
NRD 50_F			0,16		
NRD 100_S	100	0,7	0,47	4	
NRD 100_F			0,55		



product description: It is used for making an additional branching use an unequal T-piece or cross.

Advantage of this using is availability to choose bending tray with any width.

The reduction piece is delivered in singles, must be used 2 pieces for installation.

The connection is performed using the bolts NSM 6X10. To protect the cables, the bolt head is inside the cable tray. A bolt with a GMT surface finish is used for a tray with an F surface finish.

These items can also be ordered in a varnished version.

surface finish: S - Pre-Galvanized, zinc-layer 15 - 27 μm
F - Hot Dip Galvanized, zinc-layer 45 μm (min. 35 μm)



sales amount: á 1 pc

meets the requirements: ČSN 61537:02

classification : ČSN 73 0895 P 90-R
DIN 4102-12 E 90
STN 92 0205 PS 90


Fire classification depends on the specific conditions of the cable tray, detailed in the catalog Cable management systems - Fire resistant systems.

storage: ČSN EN 60721-3-1

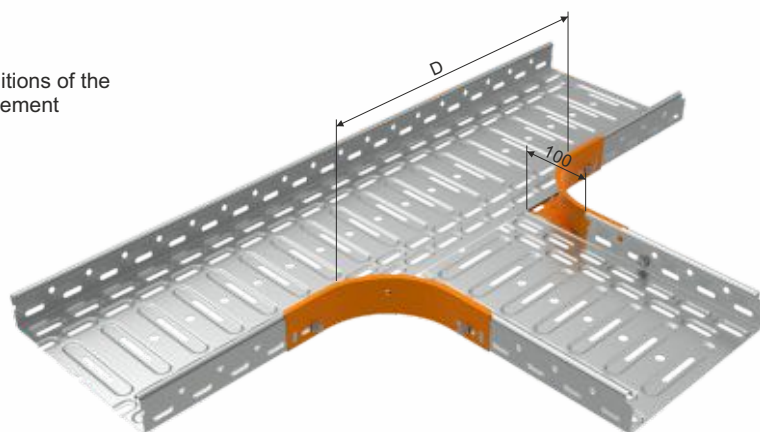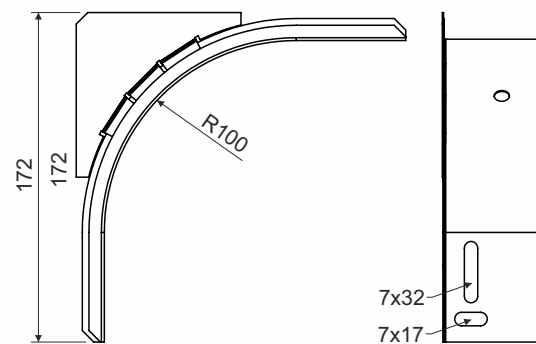

D = length of cut out side wall
of the tray

width of cable tray	D
62	262
125	325
250	450
500	700

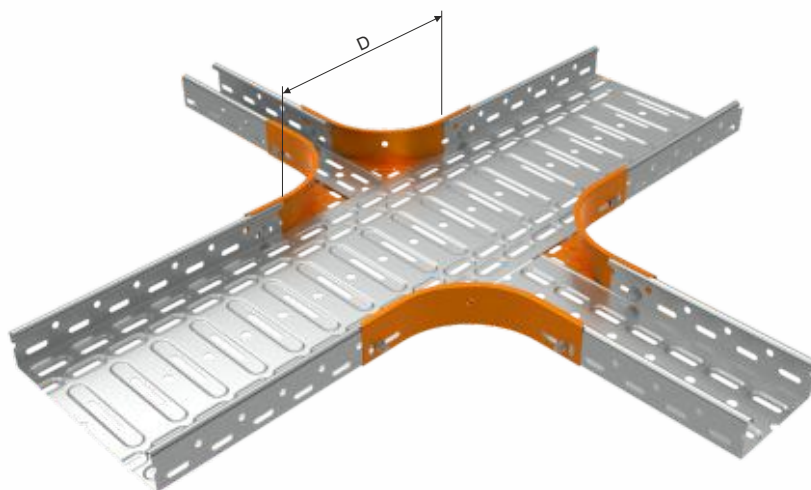

 WARNING**Risk of injury from cutting**

Although the cable trays are produced with maximum effort to minimize sharper edges, it is necessary to wear protective gloves to carry, grip and work with cable elements.

Electricity injury

As individual components of cable management systems are made of electrical conductive material, it is essential not to work with a system near live electrical parts. Infringement of the safety regulations may cause serious injury of health or death.

Safe Use

Under normal and foreseeable conditions of use, there are no risks to consumers, provided that proper installation and usage are carried out in accordance with the installation manual.

recycling codes:



NRD