

type number	B	H	L	max. number of inserted cables	max. recommended load
	mm	mm	mm	Ø 8	kN
SD 5_KA	30	55	55	15	0,13
SD 6_KA	30	103	51	30	0,16



SD 5_KA



SD 6_KA

product description:

Fast installation of multi-cable holders using a powder-actuated fastening tool.

The group holder is suitable for securing individual cables or cable bundles to walls or ceilings.

The holder can also be fixed to the substrate using suitable anchors through the Ø 4.5 mm fixing hole.

The holder allows cables to be inserted and removed after installation.

One package of SD 5_KA contains 50 pcs.

One package of SD 6_KA contains 25 pcs.

material:

Polyamide (PA6) halogen-free

sales amount:

1 pc

installation temperature:

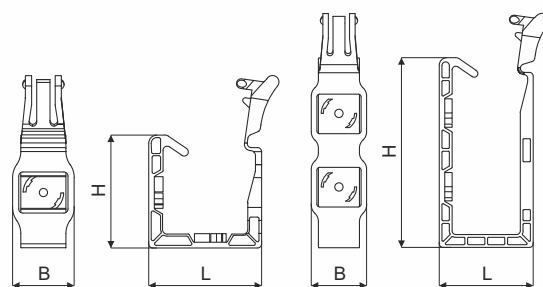
0 °C - +45 °C

max. temperature resistance:

-25 °C - +110 °C

storage:

ČSN 64 0090

**WARNING****Use of Personal Protective Equipment**

Always wear safety glasses, hearing protection, and protective gloves to minimize the risk of injury.

Proper Tool Handling

Never point the powder-actuated tool at yourself or any other person. When carrying or repositioning the tool, keep the muzzle pointed downward and your finger off the trigger. Always assume that the tool is loaded.

Inspection of the Work Area

Ensure that no persons are present in the immediate vicinity of the work area. Inspect the work area and its surroundings before starting work.

Safe Use

Under normal and foreseeable conditions of use, there are no risks to consumers, provided that proper installation and usage are carried out in accordance with the installation manual.

recycling codes:

SD5/SD6